



**YORPOWER**

RATING	MODEL	ENGINE
11kVA Open Set	YXP11D6	

**GENERAL**

**OUTPUT RATINGS 60Hz,**  
**Prime 11kVA, 9kW**  
**Standby 13kVA, 10kW**  
**ENGINE PERKINS 403D-11G**  
**ALTERNATOR LEROY SOMER**




**TECHNICAL DATA**

Engine Model	403D-11G	Engine Speed	1800RPM
Cylinders	3	Fuel Cons: 100% Load (l/hr)	3.0
Displacement	1.13 Litres	Fuel Cons: 75% Load (l/hr)	2.3
Coolant Capacity	5.2 Litres	Oil Capacity	4.9 Litres
Cooling	Water Cooled	DBA @ 7M	TBC
Fuel Tank Capacity	50 Litres	Intake System	Natural aspirated

These ratings are suitable for Prime Continuous power output at varying load with no limitation on annual hours of operation.  
 The Generator will supply 10% overload for 1 in 12 hours.

**GENERAL ARRANGEMENT**

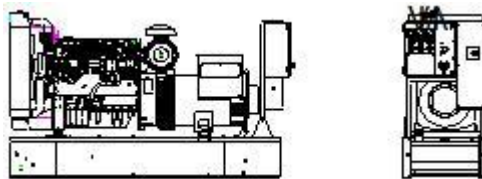

**DIMENSIONS AND WEIGHTS**

Length mm	Width mm	Height Mm	Weight Kg
TBC	TBC	TBC	TBC

We reserve the right to amend specifications without notice. All ratings are at standard ISO conditions  
 Alternators may vary subject to lead time and availability

Registered Office:  
 Yorpower Limited  
 Unit 2, Hurricane Close  
 Sherburn In Elmet  
 LS25 6PB  
 UNITED KINGDOM



**T: +44 (0) 1977 688155**  
**F: +44 (0) 1977 688158**  
 E: sales@yorpower.com  
 W: www.yorpower.com

Yorpower Limited, Registered in England and Wales No. 7035780