



YORPOWER

| RATING | MODEL | ENGINE |
|--------------------|----------|--------|
| 53kVA Canopied Set | YXP53D6S | |

GENERAL

OUTPUT RATINGS 60Hz,
Prime 53kVA, 43kW
Standby 59kVA, 47kW
ENGINE PERKINS 1103A-33TG1
ALTERNATOR LEROY SOMER




TECHNICAL DATA

| | | | |
|--------------------|--------------|-----------------------------|--------------|
| Engine Model | 1103A-TG1 | Engine Speed | 1800RPM |
| Cylinders | 3 | Fuel Cons: 100% Load (l/hr) | 12.9 |
| Displacement | 3.3 Litres | Fuel Cons: 75% Load (l/hr) | 9.9 |
| Coolant Capacity | 10.2 Litres | Oil Capacity | 8.31 Litres |
| Cooling | Water Cooled | DBA @ 7M | 59.3 |
| Fuel Tank Capacity | 180 Litres | Intake System | Turbocharged |

These ratings are suitable for Prime Continuous power output at varying load with no limitation on annual hours of operation.
 The Generator will supply 10% overload for 1 in 12 hours.

GENERAL ARRANGEMENT

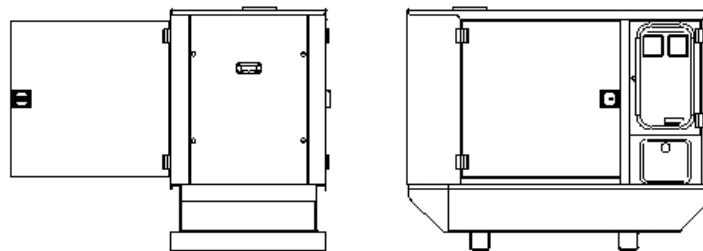

DIMENSIONS AND WEIGHTS

| Length mm | Width mm | Height Mm | Weight Kg |
|-----------|----------|-----------|-----------|
| 2338 | 1080 | 1561 | 1363 |

We reserve the right to amend specifications without notice. All ratings are at standard ISO conditions
 Alternators may vary subject to lead time and availability

Registered Office:
 Yorpower Limited
 Unit 2, Hurricane Close
 Sherburn In Elmet
 LS25 6PB
 UNITED KINGDOM



T: +44 (0) 1977 688155
F: +44 (0) 1977 688158
 E: sales@yorpower.com
 W: www.yorpower.com

Yorpower Limited, Registered in England and Wales No. 7035780