



Genset
Model:

YII60RSC

Enclosed set

Open set



Frequency	Phases	Power Factor	Prime Output	Standby Output
50Hz	3	0.8	60 kVA / 48 kW	66 kVA / 52.8 kW

Ratings

- Prime output: This rating is applicable for supplying continuous electrical power at variable load. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.
- Standby output: This rating is applicable for supplying electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings.
- Standard reference conditions: 25°C, 100m A.S.L., 30% relative humidity

Design features

- High quality assembly, providing stiffness and low vibration
- Power coated steel. Corrosion and scratch resistant.
- Compact and long service life
- Wiring and connectors with double protection.
- Protection guards in radiator and high voltage parts.
- Full 12 month YorPower warranty

Design Standards

- CE marking
- ISO8528-1995
- GB/T2820-1997
- ISO 9001:2008 Registered Company

Tel: +44 (0) 1977 688155

Fax: +44 (0) 1977 688158

Progress Generator Services | Unit 2 Hurricane Close | Sherburn in Elmet | LS25 6PB | United Kingdom

E-mail | sales@progress-group.com | Web | www.progress-group.com

Registered in England and Wales No. 7035780

Progress Generator Services is a trading name and part of the YorPower group of companies

Configuration

- 4-Stroke water-cooled diesel engine.
- Industrial silencer.
- Coolant recovery tank
- Single bearing, 4 pole brushless alternator.
- Anti vibration mountings
- Integral fuel tank with fully bunded base protection.
- Fuel level sensor
- Auto start control system with electronic digital control module DSE6020
- Output circuit breaker.
- Emergency stop button
- High engine temperature and low oil pressure shutdown system.
- 12V starter battery with leads and switch

Acoustic canopy features

- Water and dust proof design
- Door locks
- High quality sound absorbing and fire retardant inner material
- Lifting lugs
- Forklift holes in base

** The images above are for illustration purposes only.





Engine data





Engine brand	Iveco	Total oil consumption	0.10 %
Engine model	N45SM1A	Total lube oil capacity	12.80 Litres
Engine speed	1500 RPM	Cooling air flow	6696 m³/h
Number of cylinders	4	Exhaust gas flow	722 m³/h
Aspiration	Natural	Exhaust gas temperature	483 °C
Combustion system	Direct injection		
Displacement	3.3 Litres	Fuel cons. @ 100% Prime load	15 l/hr
Governor type	Mechanical	Fuel cons. @ 75% Prime load	10.20 l/hr
Cooling system	Water Cooled	Fuel cons. @ 50% Prime load	7 l/hr

Alternator data

Alternator brand	Meccalte	Number of wires	12 re-connectable
Alternator model	ECP32-2L/4	No. Poles	4
Excitation	Self excited	Voltage regulator	DSR
Insulation class	H	Efficiency Alt 3/4 %	90.80
Drip proof protection	IP23	Efficiency Alt 4/4 %	90.20
Winding pitch	2/3 (wdg 6)	Flanges and shield	Aluminium

Enclosed set data

Open set data

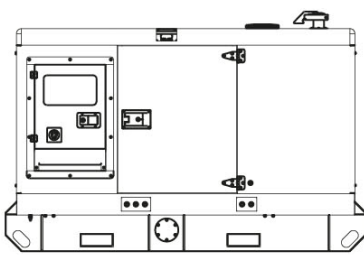

L x W x H (mm)	Weight	Fuel tank	Noise@7M
2500 x 1100 x 1455	1298Kgs	85 Litres	TBA

L x W x H (mm)	Weight	Fuel tank	Noise@7M
1900 x 900 x 1955	860Kgs	192 Litres	N/A

** Due to constant innovation, design and specifications are subject to change without notice.

Tel: +44 (0) 1977 688155
Fax: +44 (0) 1977 688158

Progress Generator Services | Unit 2 Hurricane Close | Sherburn in Elmet | LS25 6PB | United Kingdom
 E-mail | sales@progress-group.com | Web | www.progress-group.com
 Registered in England and Wales No. 7035780

Progress Generator Services is a trading name and part of the YorPower group of companies

